

1

Introduction

1.1 Background

With the rapid development of information technology, microelectronics technology has been widely used in people's daily life, such as healthcare monitoring, intelligent communications, cloud computing, big data, and Internet of Things, and has made considerable progress in intelligent information technology. However, as the current microelectronic devices mainly rely on the wired power supply or battery power supply, wired power supply greatly limits the portability of microelectronic devices and the freedom of space applications, whereas the battery power supply is unsustainable and there are certain safety and environmental pollution problems. In particular, artificial intelligence, the Internet of Things, 5G high-velocity communications, wearable and implantable electronic devices or microsystems, and other new generations of information technology are emerging and rapidly developing. A large number of distributed microsensors composed of wireless sensor networks (WSNs) is essential for these emerging technologies, which makes the problem increasingly prominent. Traditional battery power supply strategies have become a major factor limiting their progress toward miniaturization and flexibility [1]. Therefore, it is observed that the opportunities for batteryless technologies by harvesting surrounding energy of the powered objects or passive sensors are coming, and they are urgent requirements for maintaining the sustainable development of the emerging technologies.

Energy harvesting is the conversion of surrounding waste or useless kinetic, radiant, thermal, and biological energy into electrical energy (as shown in Figure 1.1), and is new energy enabling technology for wireless sensor network node applications. Kinetic energy is the energy that an object has due to its movement, such as mechanical vibrations, human movement, structure rotation, water flow, and so forth, which is ubiquitous in the environment. In contrast to any other energies in surroundings, kinetic energy is widely distributed, clean and safe, easy to miniaturize and integrate, and has a low environmental impact, making it the main source of energy for research into energy-harvesting technologies. With the rapid development of microelectronics technology, more and more low-power consumption microelectronic devices have emerged, while the rapid progress of

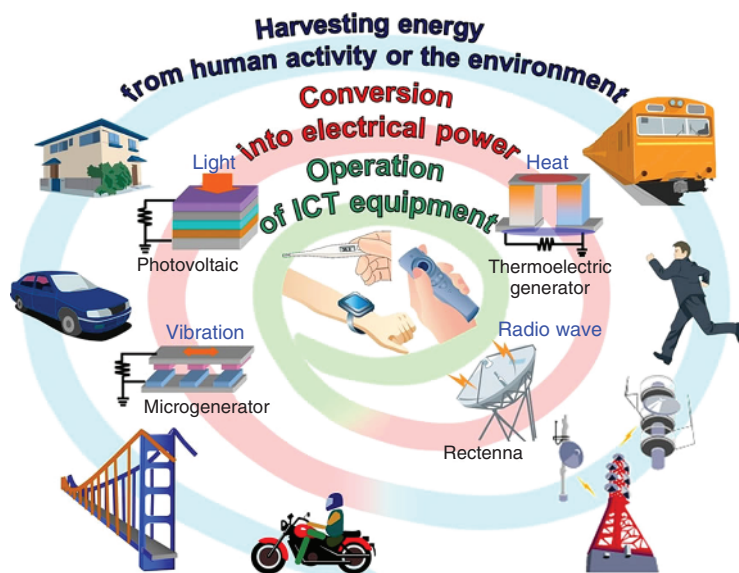


Figure 1.1 Schematic illustration of energy-harvesting strategies based on the ambient energies [2]. Source: Reprinted with permission from Fujitsu Laboratories Ltd. [2]; © 2016 MEMS consulting.

kinetic-energy-harvesting technology in terms of material preparation, conversion methods, device structures, and energy-management circuits has obtained higher and higher conversion efficiency, and the generated electricity has gradually been able to meet the power supply needs of many microelectronic devices, gradually ushering in the development opportunities of batteryless microelectronic systems. Therefore, the research of kinetic-energy-harvesting technology is expected to completely get rid of the shackles of wired power supply and battery supply, and realize batteryless power supply in complex scenarios as well as in situ self-supply of wireless sensor network nodes in the Internet of Things, so as to achieve wireless batteryless sustainable power supply, thus solving the problems of system non-portability, high maintenance costs, environmental pollution, limited life span, and related safety hazards caused by power supply wires or batteries. It is also free from the constraints of battery power supply on the development of flexible and miniaturized electronic devices.

Flexible piezoelectric sensor is one of self-powered sensors, generally be delivered into two types – one is passive sensors, such as piezoelectric sensors, electromagnetic sensors, and thermoelectric sensors; the other one is active sensors with an energy harvester to provide power supply for themselves. In this book, it is to avoid the misunderstanding that we described the former as self-power devices and the latter as batteryless devices. Self-powered sensors as passive devices can work almost without power consumption for sensing, which is significant for long-term working and energy saving. In this book, we focus on flexible piezoelectric energy harvesting and expand some corresponding technologies to discuss the development of flexible

piezoelectric tactile sensors and their applications in Internet of Things, healthcare monitoring, intelligent recognitions, and some other interesting and possible applications combining with the artificial intelligent technologies.

1.2 Working Principle of Piezoelectric Devices

Piezoelectric energy harvesting or sensing technique is mainly based on the positive piezoelectric effect of materials, which was discovered by the Curie brothers in 1880 in alpha-quartz crystals and reflects the coupling between the elastic and dielectric properties of crystals, meaning that there is no electric field but only the strain or stress generated by the action of an external force, resulting in the generation of electrodes in the crystal, leading to the appearance of a different macroscopic charge on certain surfaces or inside the medium. These macroscopic charges are called polarized charges and cannot leave the dielectric or move freely within the dielectric, so they are also called bound charges [3]. Researches into piezoelectric energy harvesting or sensing technique began at the end of the last century and the main transformation methods include the free vibration method and the forced vibration method, which all rely on mechanical surrounding excitations, such as mechanical vibration and dynamic force. Therefore, piezoelectric effect has been widely investigated for force or stress sensing and energy harvesting.

In terms of mechanical energy harvesting, piezoelectric energy harvesting is one of major components, mainly including piezoelectric, electromagnetic, electrostatic, triboelectric, flexoelectric, and electrochemical mechanisms.

Electromagnetic-energy-harvesting technology is based on Faraday's law of electromagnetic induction, using a part of the conductor of a closed circuit to make a motion of cutting magnetic induction lines in a magnetic field, causing a change in magnetic flux, forming an induced electric potential, and generating an induced current in the conductor. The main transformation methods are cantilever beam, suspension bridge, single-track-reciprocating vibration and rotary motion [4, 5]. Electrostatic-energy-harvesting techniques are used to create a circuit current by forcing a change in charge or voltage between the two plates of a capacitor through mechanical motion [6]. The main structure of an electrostatic energy harvester is a capacitive structure consisting of two conductive electrodes separated by air or dielectric and an elastic structure connected by the electrodes. The basic working principle of triboelectric-energy-harvesting technology consists mainly of contact initiation and electrostatic induction [7]. According to the charge-separation mechanism, the harvesting forms of triboelectric electrical energy harvesters can be divided into contact based on vertical charge polarization and sliding based on in-plane charge polarization. Electrochemically driven method [8] is a new type of kinetic-energy-harvesting method. Electrochemically driven energy harvesters are mainly based on the migration of ions in the composition of electrochemically active materials (e.g. alloys of Li and Si or Ge) subjected to external stresses, resulting in an electrical potential difference. The flexoelectric effect is similar to the piezoelectric effect and refers to the polarization of a dielectric material when it is bent by an

Table 1.1 Advantages and disadvantages of the different kinetic energy harvesters.

Working principles	Advantages	Disadvantages
Piezoelectric	No requirement for external energy at starting, high energy density, simple structure, and easy integration.	Easy self-discharge at low frequencies, high dependence on materials, high output impedance, and difficult flexibility.
Electromagnetic	No mechanical contact is required, low mechanical damping, high reliability, high output current, and low output impedance.	Difficult to miniaturize, low efficiency at low frequencies, low output voltage, and difficult integration.
Electrostatic	MEMS process compatibility, suitable for low frequencies, easy integration, and high electrical damping.	Dielectric breakdown, requirement of external energy at starting, complex fabrication process, high output impedance, low current, and easy to fail due to pull in instability.
Triboelectric	Good flexibility, simple structure, and high output voltage.	Low output current, dependence on friction surfaces, low reliability, susceptible to environmental humidity, difficult to miniaturize, high impedance.
Electrochemical	Flexibility and low frequency.	Low output voltage.
Flexoelectric	High-quality factor and easy integration.	Weak effect for bulk material and low output energy.

external force, resulting in structural deformation when an external electric field is applied. It is a weak effect for bulk materials [9], and therefore studies of flexural electricity are usually focused on the nanoscale.

Table 1.1 lists the advantages and disadvantages of the different mechanisms of kinetic-energy-harvesting methods. From the table, it can be found that electromagnetic and triboelectric methods are difficult to miniaturize due to their mechanism of action, and electromagnetic-energy-harvesting methods are difficult to be compatible with flexible electronic devices; triboelectric-energy-harvesting methods are not yet able to break through the limitation on material triboelectric surface loss; electrostatic methods are highly dependent on the level of process integration and manufacturing, and are prone to microscale adsorption failure problems; electrochemical drive methods and flexoelectric methods are too inefficient in terms of output. It is still difficult to meet the power supply needs of low-power microelectronic devices. In contrast, piezoelectric-energy-harvesting methods have been widely studied for their high energy density, simple structure, easy integration, and no need for external energy to start, but they also suffer from high-frequency dependence, limited piezoelectric material properties, flexibility difficulties, and high output impedance. The flexible piezoelectric-energy-harvesting technology based on mechanical thinning process is expected to solve the problems faced in the development of flexible piezoelectric energy harvesters.


1.3 Requirement for Flexible PEH

The application conditions of piezoelectric-energy-harvesting technology are very demanding. On the one hand, it requires sufficient mechanical energy available in the working environment, and on the other hand, it requires the device to provide sufficient electrical energy under the premise of ensuring applicability and safety, so the working environment of the device and the power consumption of the equipment to be powered become the main limiting factors for the expansion of the application field of piezoelectric-energy-harvesting technology, which is also the main hot spot of the current applied research.

In terms of common microelectronic devices, the application of energy-harvesting technologies is mainly to consider some specific environments where wired power supply is inconvenient and battery power supply is a safety hazard due to the life-time problem, and the realization of batteryless devices can effectively get rid of these problems. At present, the batteryless research of low-power electronic devices mainly includes some implantable medical devices with low power consumption (as shown in Figure 1.2) and pressure monitoring systems (as shown in Figure 1.3).

As for rapidly developing Internet of Things, it refers to various devices and technologies, such as various information sensors, radio-frequency identification technology, global positioning system, infrared sensors, laser scanners, to collect any object or process that needs to be monitored, connected, and interacted with in real time, collecting its sound, light, heat, electricity, mechanics, chemistry, biology, location, and various other needed information, and through various possible network access, realize the ubiquitous connection between things and things, things and people, and realize the intelligent sensing, identification and management of objects and processes. The Internet of Things is an information carrier based on

Figure 1.2 Power consumption of different medical and implantable devices [10, 11]. Source: Data from Yang et al. [10].

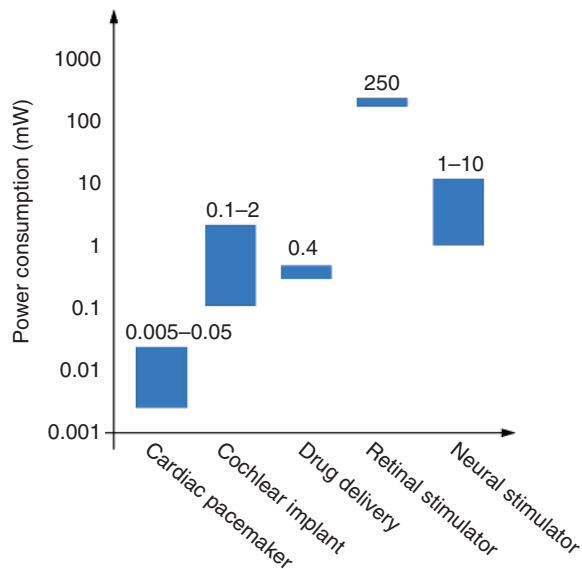

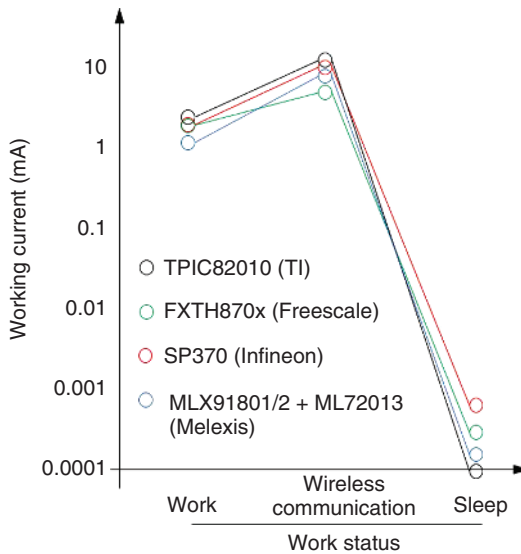


Figure 1.3 The main IC solutions of the tire pressure monitoring system on Market [10]. Source: Data from Yang et al. [10].

the Internet and traditional telecommunication networks, which allows all common physical objects that can be independently addressed to form an interconnected network. Combined with Artificial Intelligent (AI) technology and the new generation of high-speed communication technology (5G or 6G) to achieve high-speed processing of sensory information, high-speed interaction, to achieve timely sensing and timely decision-making of the artificial intelligence & Internet of Things (AIoT) system.

The current power consumption of most IoT devices is shown in Figure 1.4. When using these devices to achieve the interconnection and interoperability of everything, such a huge power supply network is also needed behind the huge connectivity network. Given that wired power supply will greatly limit the scope of its spatial application, the current reliance on battery-powered wireless sensing network technology, however, will certainly cause a large amount of battery consumption and high maintenance costs due to battery life, so the development of the Internet of Things urgently needs a convenient and sustainable power supply network.

With the development of energy-harvesting technology and low-power IoT devices, the environmental energy that can be converted by energy harvesters also gradually meets the power supply needs of some IoT devices, and in the future, with the further development of both, it is very promising to achieve sustainable power supply for IoT. Figure 1.5 shows the power density and output voltage range statistics of common energy-harvesting methods and lithium-ion battery technology. In terms of mechanical kinetic energy harvesting, piezoelectric-energy-harvesting technology can achieve greater energy density and output voltage compared to electromagnetic-energy-harvesting technology and has the potential to be a greater alternative to lithium batteries.

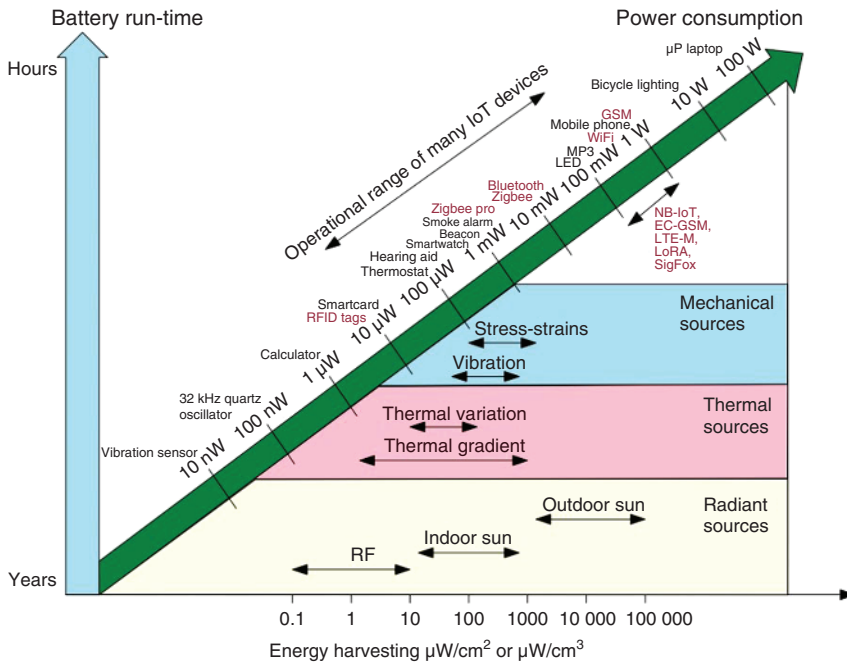


Figure 1.4 Power consumption for various applications of IoT and power densities for various energy sources. Source: Shirvanimoghaddam et al. [12] / CC BY-SA 4.0.

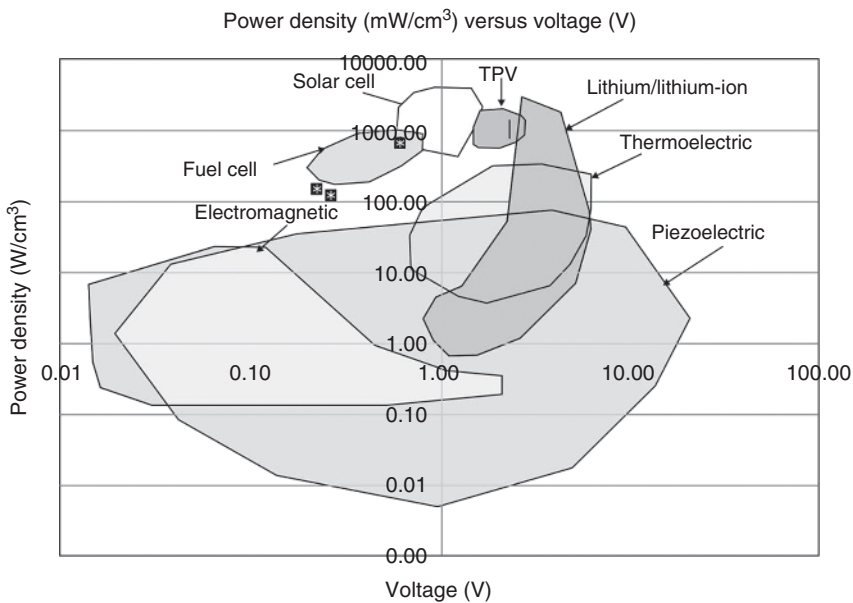


Figure 1.5 Power density versus voltage comparison of common regenerative and lithium/lithium-ion power supply strategies. Source: Cook-Chennault et al. [13] / with permission of IOP Publishing.

1.4 Requirement for Flexible Piezoelectric Sensors

For decades, miniaturization of electronics and advances in materials are paving the way for prosperous development of wearable and implantable devices. Human is experiencing the great conveniences that are brought by diverse electronics, including smartwatch, glasses, shoes, glove, pacemaker, and necklace. With the aid of 5G communication, artificial intelligence, and edge computing, the highly digitized human will undergo a seamless involvement in the whole network or internet of things. Some of them possess the functions of the mobile console for processing and displaying the data. Meanwhile, various sensors with physical, optical, or chemical mechanisms, form another major group in wearable or implantable systems. Hence, our physical activities, vital sign, and physio-biochemical indicators can be continuously monitored for health inspection or performing manipulations, besides, the environmental variations are also able to be detected for further utilization. However, the current commercialized wearable and implantable devices usually rely on the battery-based power supply, such as piezoresistive, optical, and capacitive sensors, and various actuators, which are inevitably encountered with some constraints, including the long-term sustainability and the further shrinkage of device size. As a solution to this urgent power issue, a flexible piezo-microelectromechanical system (piezo-MEMS)-integration strategy was presented on base of piezoelectric thick film with good piezoelectric properties. The sensors based on piezoelectric effect attract broad attention due to their intrinsic high dynamic response and high fidelity [14–19], especially ultra-low power consumption.

In this book, we intend to discuss piezoelectric energy harvesters (PEHs) and piezoelectric sensors on account of the piezo-MEMS thick-film process. The discussion starts with fabrication of piezo-MEMS thick film, design of piezoelectric devices, and some methods of theoretical analysis. Then, we firstly introduce the usual investigations, including common linear-mechanism cantilever piezoelectric energy harvester based on the piezoelectric thick film and nonlinear-mechanism PEHs, to discuss the design and fabrication of the PEHs. Thereafter, we introduce the rotation-driven flexible PEH, the aeroacoustics-driven jet-stream wind energy harvester, and the wearable and implantable PEHs in different chapters, respectively. Finally, we focused on the piezoelectric tactile sensors and advances in artificial-intelligence-assisted flexible sensors.

1.5 Summary

In this book, we focused on introducing the recent advances and important development in flexible piezoelectric energy harvesting and sensing techniques, mainly including the design, fabrication, theoretical analysis, nonlinear mechanism induced bandwidth properties, and some applications in self-powered systems of flexible piezoelectric energy harvesters, and we also introduced the key role of flexible piezoelectric devices in the field of wearable electronics and tactile sensing.

We also provided some introduction about the emerging research directions due to disciplines-crossing, such as artificial intelligence technology-assisted design optimization, data processing, or sensing recognition.

References

- 1 Gao, W., Emaminejad, S., Nyein, H. et al. (2016). Fully integrated wearable sensor arrays for multiplexed in situ perspiration analysis. *Nature* 529: 509–514.
- 2 Fujitsu Laboratories Ltd. (2010). Fujitsu Develops Hybrid Energy Harvesting Device for Generating Electricity from Heat and Light. <https://www.fujitsu.com/global/about/resources/news/press-releases/2010/1209-01.html>.
- 3 Toprak, A. and Tigli, O. (2014). Piezoelectric energy harvesting: state-of-the-art and challenges. *Applied Physics Reviews* 1: 031104.
- 4 Williams, C.B., Shearwood, C., Harradine, M.A. et al. (2001). Development of an electromagnetic micro-generator. *IEEE Proceedings-Circuits Devices and Systems* 148: 337–342.
- 5 Tan, Y., Dong, Y., and Wang, X. (2017). Review of MEMS electromagnetic vibration energy harvester. *Journal of Microelectromechanical Systems* 26: 1–16.
- 6 Khan, F.U. and Qadir, M.U. (2016). State-of-the-art in vibration-based electrostatic energy harvesting. *Journal of Micromechanics and Microengineering* 26: 103001.
- 7 Niu, S., Liu, Y., Wang, S.H. et al. (2014). Theoretical investigation and structural optimization of single-electrode triboelectric nanogenerators. *Advanced Functional Materials* 24: 3332–3340.
- 8 Kim, S., Choi, S.J., Zhao, K.J. et al. (2016). Electrochemically driven mechanical energy harvesting. *Nature Communications* 7: 10146.
- 9 Bhaskar, U.K., Banerjee, N., Abdollahi, A. et al. (2016). A flexoelectric microelectromechanical system on silicon. *Nature Nanotechnology* 11: 263–266.
- 10 Yang, Z., Zhou, S., Zu, J., and Inman, D. (2018). High-performance piezoelectric energy harvesters and their applications. *Joule* 2: 642–697.
- 11 Ohm, O.J. and Danilovic, D. (1997). Improvements in pacemaker energy consumption and functional capability: four decades of progress. *PACE* 20: 2–9.
- 12 Shirvanimoghaddam, M., Shirvanimoghaddam, K., Abolhasani, M.M. et al. (2019). Towards a green and self-powered internet of things using piezoelectric energy harvesting. *IEEE Access* 7: 94533–94556.
- 13 Cook-Chennault, K.A., Thambi, N., and Sastry, A.M. (2008). Powering MEMS portable devices – a review of non-regenerative and regenerative power supply systems with special emphasis on piezoelectric energy harvesting systems. *Smart Materials and Structures* 17: 043001.
- 14 Yi, Z., Huang, J., Liu, Z. et al. (2020). Portable, wireless wearable piezoelectric arterial pulse monitoring system based on near-field communication approach. *IEEE Electron Device Letters* 41: 183–186.

- 15 Yi, Z., Yang, H.J., Tian, Y.W. et al. (2018). Self-powered force sensor based on thinned bulk PZT for real-time cutaneous activities monitoring. *IEEE Electron Device Letters* 39: 1226–1229.
- 16 Dagdeviren, C., Su, Y.W., Joe, P. et al. (2014). Conformable amplified lead zirconate titanate sensors with enhanced piezoelectric response for cutaneous pressure monitoring. *Nature Communications* 5: 4496.
- 17 Ershad, F., Thukral, A., Yue, J.P. et al. (2020). Ultra-conformal drawn-on-skin electronics for multifunctional motion artifact-free sensing and point-of-care treatment. *Nature Communications* 11: 3823.
- 18 Wang, C., Li, X.S., Hu, H.J. et al. (2018). Monitoring of the central blood pressure waveform via a conformal ultrasonic device. *Nature Biomedical Engineering* 2: 687–695.
- 19 Wang, H., Wang, L., Sun, N.N. et al. (2020). Quantitative comparison of the performance of piezoresistive, piezoelectric, acceleration, and optical pulse wave sensors. *Frontiers in Physiology* 10: 1563.